

Floor Scale CI-200A



FEATURES



- Simple and prompt full digital calibration
- High A/D conversion speed (80 times/sec)
- High resolution 1/10,000
- Multi-calibration
- Weight back-up function
- Weight Comparison: Hi, Low, OK (only LCD)
- Numeric keys & function keys
- Various power supplies [DC adaptor, Rechargeable battery or AA size dry battery x 6 (option)]
- 4 & 6 wire load cell support
- 2 serial ports
 - Standard: 1 port
 - Option: 1 additional port (for PC, Printer, Remote display communication, etc)
- Multi-purpose cradle
- Interface
 - Standard: RS-232C
 - Option: RS-422, RS-485

OPTIONS

- Dry battery holder
- 1 additional serial port
- Remote display
- Printer (DLP-50, DEP-50)
- RS-422/RS-485 Interface



Double frame

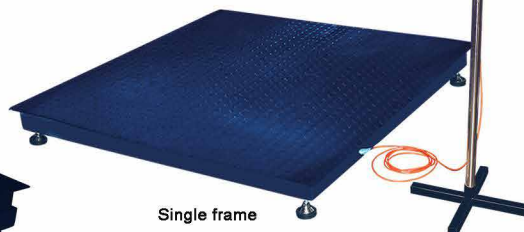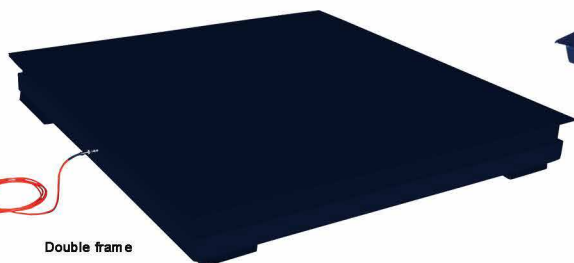

Single frame

Specifications :

Platform size (mm)	Capacity (kg)	Readability(kg)
1000 x 1000	500	0.2
1000 x 1000	1000	0.5
1200 x 1200	500	0.2
1200 x 1200	1000	0.5
1200 x 1200	2000	1
1200 x 1500	2000	1
1200 x 1500	3000	1
1500 x 1500	1000	0.5
1500 x 1500	2000	1
1500 x 1500	3000	1
1500 x 1500	5000	2
1500 x 2000	1000	0.5
1500 x 2000	2000	1
1500 x 2000	3000	1
1500 x 2000	5000	2
2000 x 2000	1000	0.5
2000 x 2000	2000	1
2000 x 2000	3000	1
2000 x 2000	5000	2
2000 x 3000	2000	1
2000 x 3000	3000	1
2000 x 3000	5000	2