

INDUSTRIAL WEIGHING SOLUTION™

CI-2001A(N)/B(N)

Simple Indicator

CI-2001 series offers fast and accurate weighing and easy operating system.
CI-2001A(N) is equipped with a bootloader, which enables firmware update through PC Software.



Shielded Against Noise (RFI & EMI)

Various Communication Rear Display for Customer


Firmware update through PC Software

Shielded Against Noise

EMI

RFI

Various Communication



Firmware update through PC Software



Scan with your smartphone
to find more products



CAS
www.globalcas.com

CI-2001A(N)/B(N)

Simple Indicator (Weighing Controller)



FEATURE


- Shielded against noise (RFI & EMI)
CI-2001 series is shielded against noises such as RFI and EMI, offering supreme stability in rough environmental conditions.



- Firmware update through PC Software
CI-2001A(N) is equipped with a bootloader, which enables firmware update through PC Software.



- Various Communication
RS-232 / RS-485 / USB

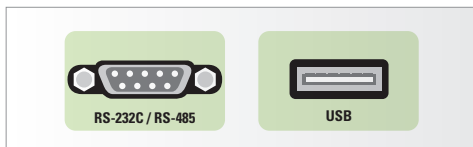

- Wall-mounted / Small Indicator
- Using Adaptor
- Automatic weight set-up
- Watch-Dog circuitry (System restoration)
Saving of weight at sudden power failure
- Display type
CI-2001A(N) LED type
CI-2001B(N) LCD type



APPLICATION

- Floor Scale / Platform Scale / Pallet Scale / Forklift Scale




OPTION

- RS-442 interface
- Inner Clock (CI-2001B only)

SPECIFICATIONS

MODEL	CI-2001A (NEW)
Loadcell Ex. Volt	DC5V
Loadcell Input Range	-0.5 mV/V ~ 2.2 mV/V
In. Sensitivity	0.5 uV/D
Internal Resolution	1 / 60,000
A/D Conversion Speed	10 time/sec
Display Type	7-Segment LED
Key	6 Function keys
Communication	RS-232C, 485, USB
Power	Adaptor DC 12V
Temperature range	-10 °C ~ 40 °C

DIMENSION

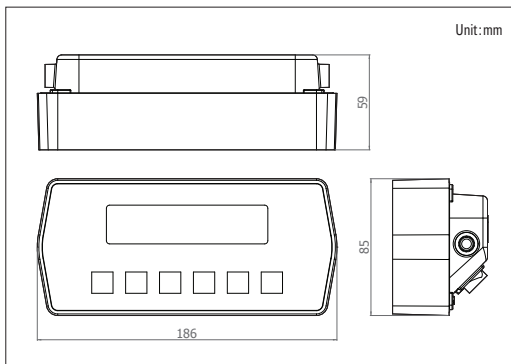

CAS BLDG., 1315, YANGJAE-DAERO,
GANGDONG-GU, SEOUL, KOREA

TEL. 82 2 2225 3500

FAX. 82 2 475 4668

Specifications are subject to change without notice improvement



<http://www.globalcas.com>

CAS