



GM - C Loadcell

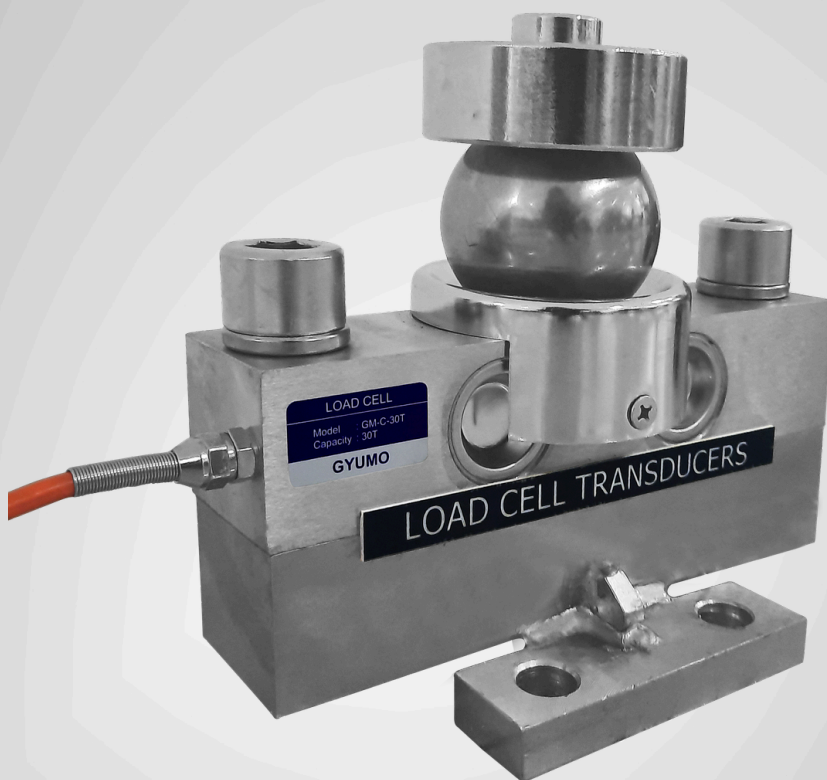

GM - C Loadcell

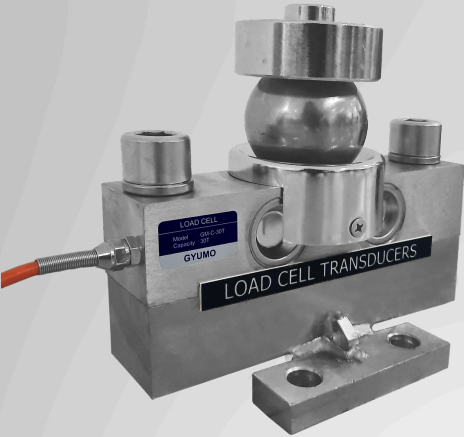

GM - C 30T Load Cell

Powerful Double-Ended Beam Load Cell with High-Accuracy readability. Built with sturdy material and Best-Quality orange cable. Equipped with strong mounting ball.

Features :

- High precision, reliability, and super stability
- Design of stainless steel ball, cup has super functions in self-restoring corner pre-adjustment
- Anti-wallop and anti-side force
- Easy to installation good interchangeability
- 5 core high quality orange cable
- Application to truck scale, railway scale, hopper scale, and other weighing equipment

SPECIFICATION			
Rated Capacities (EMAX)	30T	Temperature, Compensated	-10°C ~ +40 °C
Rated Output	1.8004m VN	Temperature, Operating	-30°C ~ +70 °C
Accuracy Class	C3	Maximum Safe Overload	120%F.S
Zero Balance	±1%F.S	Ultimate Overload	200%F.S
TC ZERO	±0.02%F.S/10°C	Excitation, Recommended	10-12V SV
TC SPAN	±0.02%F.S/10°C	Excitation, Maximum	15V DC
Input Resistance	752.2	Protection Class	IP68
Output Resistance	701.2?	Construction	Alloy Steel
Insulation Resistance	=5000M?	Cable	Length : 16m

Diameter : ø6mm

Rated Load (t)	5	10,15,20,25,30	40
D1	68	85-88	88
D2	50.8	76.2	76.2
H	168.8	224.7	230.7
L	224	240	240

