



LA-228

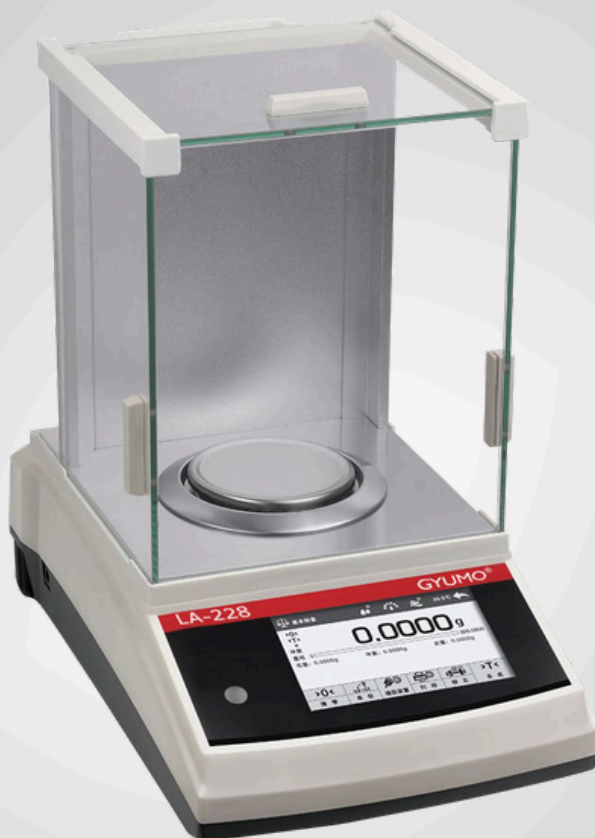

LA-228 | Analytical Balance

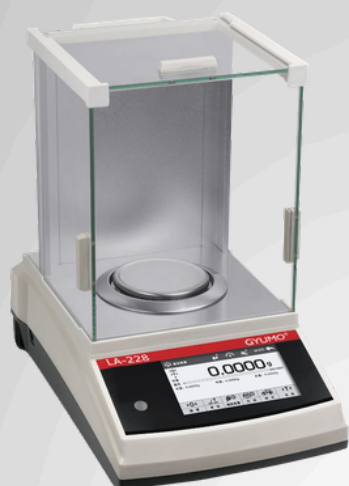

LA-228

Super Monobloc Sensor

This monolithic sensor technology's feature are fast weighing response, high durability, continually coherence, compatible of sensitivity and stability

Set Dual intelligent Internal Cal

In condition that nothing on the pan, the balance will calibrate itself automatically when temperature or interval time reaches user-set value

Characteristic:

- HD color touchscreen
- Super Monobloc sensor
- Capacity progress bar in real time
- Auto dual range, dual precision
 - Customized dual intelligent internal calibration
- Real-time temperature compensation
- Seven level anti-vibration adjustable
- Weighing stableness time adjustable
- More than 20unit shield: g,mg,ct...
- Two customized units
- Default weighing mode automatically
- Date, time and temperature setting
- With carrying handle and rear tool box
- With underhook, RS232 and USB
- Measurements are directly readable on PC
- Antistatic drafshield with mental backboard
- Optional with wireless communication function
- Overload protection

Application Mode

- Percentage Weighing
- With density determination
- With dynamic weighing function
- Selectable weighing and count mode
- Pricing function
- High-low weighing function
- Gross/Net/Tare weight weighing
- Peak holding function
- Accumulate function

SPECIFICATION

Model	LA-228
Capacity	220g/320g
Readability	0.1mg/1mg
Repeatability	±0.1mg/±1mg
Linearity	±0.02mg/±2mg
Min. Weight	10mg
Pan Size (mm)	φ 90
Response Time	2-5 sec
Housing	345mm*223mm*331mm